


OUTDOOR DECORATIVE WALL LIGHT CURVE IP54 380LM 7.5W 4000K DOWN LIGHT DARK GREY INTEGRAL

ILDEA028

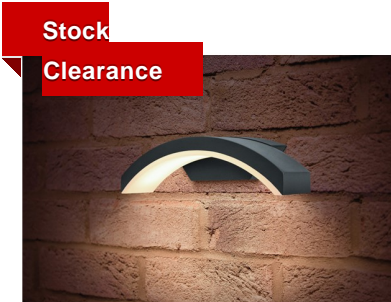

Light up the exterior of your home with these compact, stylish and contemporary LED luminaires. Weatherproof and hard-wearing, this range is designed to last against the elements while bringing a designer look to your surroundings. Sleek and sophisticated, the Curve wall light is the ideal accessory to light up your outdoor space.

Details

Barcode:	5055788240198
Quick Order Code:	825975
Category:	Luminaires
Range Name:	Wall Light
Product Type:	Outdoor
Market Segment:	Residential Outdoor
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	270
Product Depth (mm):	112
Product Width (mm):	82
Product Weight (g):	675
Optic:	Opal Polycarbonate diffuser
Material:	Die cast aluminium body with powder coated finish
Luminaire Fixing:	Wall Mounted
Placement / Application:	Outdoor, General Lighting

Electrical Data

Power Consumption (W) :	7.5
Power Factor:	0.8
Voltage Range (v):	220-240
Amperage (mA):	350
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC


EN: EN-60598
LVD Certified: Yes

Light Data

Luminous Flux in Lumens (lm): 420
Luminous efficacy (lm/W): 56
Correlated Colour Temperature (CCT) (K): 4000
Colour Temperature: 4000
Colour Temperature Name: Cool White
Colour Rendering Index (CRI): 80
Frequency Range (Hz): 50/60
Instant on (Less than 1 second): Yes
LED Type: Surface mounted device (SMD)
Lifetime (hours): 25000
Switching Cycles: 12500

Environment

EN: EN-60598
LVD Certified: Yes
CE RoHS: Yes
New Energy Rating: G
EU Luminaire: L
Hg 0% (Mercury Free): Yes
IP Rating (Ingress Protection): IP54
Lowest Operating Temperature (°C): -20
Maximum Operating Temperature (°C): 40

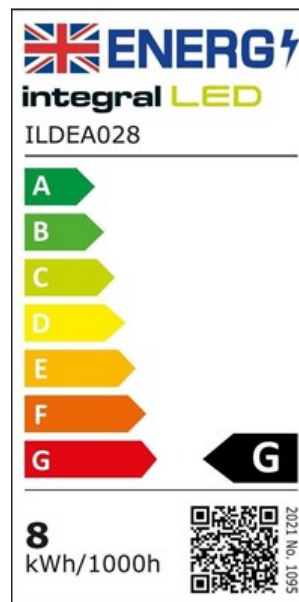

Packaging

Package Weight (g): 780
Package Length (mm): 285
Package Width (mm): 95
Package Depth (mm): 122

Portal.integral-led.com